

The XAS range is used to dry and store glassware by injecting air into the working volume at an adjustable temperature up to 60°C. They are functional, easy-to-use and -to-clean, and energy efficient.

As beautiful as effective.

The inner and outer casings are made of steel sheets coated with epoxy paints. Durability. Control panel on top.



An easy-to-use temperature control.

C3030 PID electronic controller. Measurement by PT100 or thermocouple sensor. **1 program with 8 steps max** (4 programmable heating-up ramps and 4 temperature maintenance levels with timer).

Display of the setpoint and measured temperature, and the heating power used. Monitoring of your current program. Pause or stop the program. Delayed start, repeat loop. PID adjustment.



Swivel castors with integrated foot.

Easy to move. Height-adjustable feet to stabilize and level the cabinet.

Double door.

2 security glasses. Shockproof.

Stainless steel shelves.

2 shelves delivered with XAS320.

3 shelves delivered with XAS800.


Multiple levels of loading. Perforated for better circulation of warm air.

Exclusive ventilation system !

Air is sucked by fan engines located in the top part of the oven. It is heated then blown out by the back bottom part.

This air recycling and a permanent air change allow an excellent drying of your glassware.

The moist air escape through an opening at the top of the cabinet.

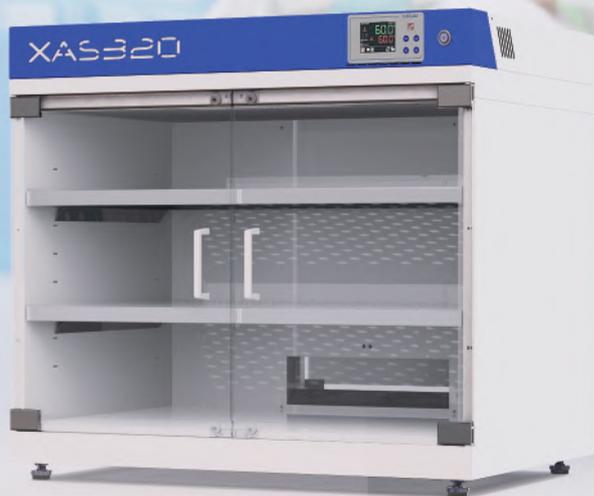

Fixed feet.

Height adjustable.

www.france-etuves.com

XAS RANGE

GLASSWARE DRYING CABINETS

TECHNICAL DATA



	XAS320	XAS800
SIZES		
Working volume (L)	320	800
Internal width (mm)	900	900
Internal depth (mm)	600	600
Internal height (mm)	600	1480
External width (mm)	946	943
External depth (mm)	736	745
External height (mm)	883	1828
Weight, empty (kg)	92	115
Number of door(s)	2	2
PERFORMANCES		
Temperature range (°C)	up to 60°C	
ELECTRICAL DATA		
Heating power (W)	2000	2000
Power	230V ~1P 50/60Hz, 16A	
LOADING SHELVES		
Maximum number	6	12
Maximum distributed load per shelf (kg)	30	30
Maximum load in the cabinet (kg)	60	120

ACCESSORIES



1 Shelf with guide bars

- Shelf with guide bars**
Stainless steel. Perforated. Maximum distributed load : 30 kg.
- Subframe with casters** (for XAS320)
Elevates the cabinet for a easier loading.
Swivel castors with brakes.
Shelf surcharge.



2 Subframe with castors



Order a few click...
store.france-etuves.com

Web, mobile, tablet, order easily
and receive your products quickly !

store.france-etuves.com



FRANCE ETUVES
Ovens Designer & Manufacturer

65/67 rue Auguste Meunier 77500 Chelles, FRANCE

Tel : +33 1 64 21 30 60